





# #34120 HeiQ Smart Temp:

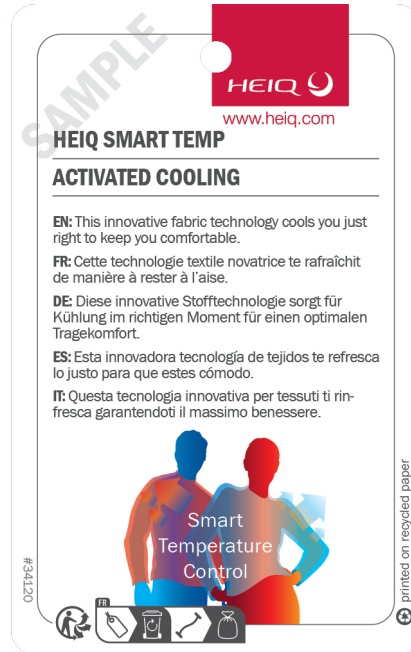

<b>HeiQ required test to use this hangtag</b>	<p>QV: <i>initial and after 10x washes</i>          QC: <i>after 3x washes</i></p> <p><b>HeiQ Dynamic Evaporation</b></p> <ul style="list-style-type: none"> <li>• <i>For lightweight fabrics (up to 150gsm):</i> Dynamic evap. rate P ≥ 30% points (compared to the unwashed untreated fabric)</li> <li>• <i>For heavy fabrics (more than 150gsm):</i> Dynamic evap. rate P ≥ 15% points (compared to the unwashed untreated fabric)</li> </ul>
<b>*For use in following countries</b>	Worldwide
<b>Languages</b>	Multilingual (EN/FR/DE/ES/IT)
<b>Used for following HeiQ products</b>	HeiQ Adaptive AC-06 HeiQ Adaptive AC-03

 It is the manufacturer's / brand's responsibility to fulfill the local labeling requirements and ensure that the correct hangtag is being attached to their product!

QV = Quality Validation / QC = Quality Control, Washes acc. to. ISO 6330 (suggested 4G)